


PN AJF 90

Pritisna nazuvica, ORFS W90°

HANSA FLEX

Osobine

| | |
|--------------------|---|
| Oblast primene | Pritisna nazuvica za creva HD 100 do HD 400, KP, TE |
| Priključak 1 | UN/UNF navoj navrtke |
| Oblik zaptivke 1 | ravno zaptivanje |
| Skraćenica | ORFS |
| Norma | ISO 8434-3 |
| Materijal | čelik |
| Površinska zaštita | galvanska prevlaka |

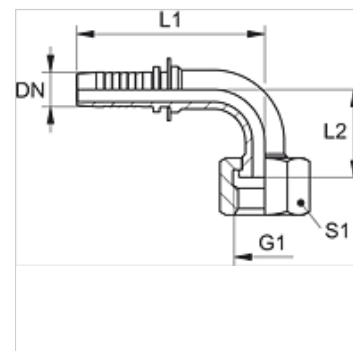

Napomena

Odgovarajući priključak molimo da odaberete prema tipu creva.

Artikal

| Naziv | DN | Veličina | col | Radni pritisak (bar) | G1 | L1 (mm) | L2 (mm) | S1 |
|---------------------|----|----------|--------|----------------------|-----------------|---------|---------|----|
| PN 06 AJF 90 | 6 | 4 | 1/4" | 413,0 | 9/16" -18 UNF | 55,0 | 26,5 | 17 |
| PN 06 AJF 90 L21 | 6 | 4 | 1/4" | 413,0 | 9/16" -18 UNF | 55,0 | 21,0 | 17 |
| PN 06 AJF 90 L58 | 6 | 4 | 1/4" | 413,0 | 9/16" -18 UNF | 55,0 | 58,0 | 17 |
| PN 06 AJF 10 90 | 6 | 4 | 1/4" | 413,0 | 11/16" -16 UN | 55,0 | 28,0 | 22 |
| PN 08 AJF 10 90 | 8 | 5 | 5/16" | 413,0 | 11/16" -16 UN | 58,0 | 28,0 | 22 |
| PN 08 AJF 10 90 L23 | 8 | 5 | 5/16" | 413,0 | 11/16" -16 UN | 58,0 | 23,0 | 22 |
| PN 10 AJF 90 | 10 | 6 | 3/8" | 413,0 | 11/16" -16 UN | 64,0 | 32,0 | 22 |
| PN 10 AJF 90 L23 | 10 | 6 | 3/8" | 413,0 | 11/16" -16 UN | 64,0 | 23,0 | 22 |
| PN 10 AJF 90 L 69 | 10 | 6 | 3/8" | 413,0 | 11/16" -16 UN | 64,0 | 69,0 | 22 |
| PN 10 AJF 13 90 | 10 | 6 | 3/8" | 413,0 | 13/16" -16 UN | 64,0 | 33,0 | 24 |
| PN 13 AJF 10 90 L30 | 12 | 8 | 1/2" | 413,0 | 11/16" -16 UN | 72,5 | 30,0 | 22 |
| PN 13 AJF 90 | 12 | 8 | 1/2" | 413,0 | 13/16" -16 UN | 72,5 | 37,0 | 24 |
| PN 13 AJF 90 L29 | 12 | 8 | 1/2" | 413,0 | 13/16" -16 UN | 72,5 | 29,0 | 24 |
| PN 13 AJF 90 L82 | 12 | 8 | 1/2" | 413,0 | 13/16" -16 UN | 72,5 | 82,0 | 24 |
| PN 13 AJF 16 90 | 12 | 8 | 1/2" | 413,0 | 1" -14 UNS | 72,5 | 41,0 | 30 |
| PN 13 AJF 20 90 | 12 | 8 | 1/2" | 413,0 | 1.3/16" -12 UN | 71,5 | 43,5 | 36 |
| PN 13 AJF 20 90 L38 | 12 | 8 | 1/2" | 413,0 | 1.3/16" -12 UN | 72,5 | 38,0 | 36 |
| PN 16 AJF 90 | 16 | 10 | 5/8" | 413,0 | 1" -14 UNS | 88,0 | 47,5 | 30 |
| PN 16 AJF 90 L32 | 16 | 10 | 5/8" | 413,0 | 1" -14 UNS | 88,0 | 32,0 | 30 |
| PN 16 AJF 90 L94 | 16 | 10 | 5/8" | 413,0 | 1" -14 UNS | 88,0 | 94,0 | 30 |
| PN 16 AJF 20 90 | 16 | 10 | 5/8" | 413,0 | 1.3/16" -12 UN | 89,5 | 49,0 | 36 |
| PN 20 AJF 90 | 19 | 12 | 3/4" | 413,0 | 1.3/16" -12 UN | 99,5 | 52,0 | 36 |
| PN 20 AJF 90 L48 | 19 | 12 | 3/4" | 413,0 | 1.3/16" -12 UN | 99,5 | 48,0 | 36 |
| PN 20 AJF 90 L96 | 19 | 12 | 3/4" | 413,0 | 1.3/16" -12 UN | 99,5 | 96,0 | 36 |
| PN 20 AJF 25 90 | 19 | 12 | 3/4" | 413,0 | 1.7/16" -12 UN | 98,5 | 56,0 | 41 |
| PN 25 AJF 20 90 L51 | 25 | 16 | 1" | 413,0 | 1.3/16" -12 UN | 127,0 | 51,0 | 36 |
| PN 25 AJF 90 | 25 | 16 | 1" | 413,0 | 1.7/16" -12 UN | 127,0 | 63,5 | 41 |
| PN 25 AJF 90 L56 | 25 | 16 | 1" | 413,0 | 1.7/16" -12 UN | 127,0 | 56,0 | 41 |
| PN 25 AJF 90 L114 | 25 | 16 | 1" | 413,0 | 1.7/16" -12 UN | 127,0 | 114,0 | 41 |
| PN 32 AJF 90 | 31 | 20 | 1.1/4" | 275,0 | 1.11/16" -12 UN | 151,5 | 76,0 | 50 |
| PN 32 AJF 90 L129 | 31 | 20 | 1.1/4" | 275,0 | 1.11/16" -12 UN | 151,5 | 129,0 | 50 |
| PN 40 AJF 90 | 38 | 24 | 1.1/2" | 275,0 | 2" -12 UN | 176,5 | 89,0 | 60 |
| PN 40 AJF 90 L146 | 38 | 24 | 1.1/2" | 275,0 | 2" -12 UN | 176,5 | 146,0 | 60 |