


# PN SF VA

Pritisna nazuvica, SFL

## Osobine

|                         |   |
|-------------------------|---|
| <b>Oblast primene</b>   | Pritisna nazuvica za creva HD 100 do HD 400, KP, TE |
| <b>Priključak 1</b>     | SAE priključak prirubnice 3000 PSI                  |
| <b>Oblik zaptivke 1</b> | ravno zaptivanje sa SF O-prstenom                   |
| <b>Skraćenica</b>       | SFL   |
| <b>Norma</b>            | SAE J518<br>ISO 6162-1                              |
| <b>Materijal</b>        | plemeniti čelik                                     |

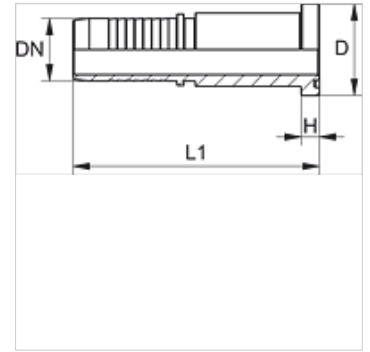

## Napomena

Odgovarajući priključak molimo da odaberete prema tipu creva.

## Napomene u vezi porudžbine

NBR зaptивке

ФГМ (витон) на захтев

## Artikal

| Naziv          | DN | Veličina | col    | Veličina spojnice | Radni pritisak (bar) | D (mm) | H (mm) |
|----------------|----|----------|--------|-------------------|----------------------|--------|--------|
| PN 13 SF VA    | 12 | 8        | 1/2"   | 1/2"              | 350,0                | 30,2   | 6,7    |
| PN 13 SF 20 VA | 12 | 8        | 1/2"   | 3/4"              | 350,0                | 38,1   | 6,7    |
| PN 16 SF 13 VA | 16 | 10       | 5/8"   | 1/2"              | 350,0                | 30,2   | 6,7    |
| PN 16 SF 20 VA | 16 | 10       | 5/8"   | 3/4"              | 350,0                | 38,1   | 6,7    |
| PN 20 SF VA    | 19 | 12       | 3/4"   | 3/4"              | 350,0                | 38,1   | 6,7    |
| PN 20 SF 25 VA | 19 | 12       | 3/4"   | 1"                | 320,0                | 44,5   | 8,0    |
| PN 25 SF VA    | 25 | 16       | 1"     | 1"                | 320,0                | 44,5   | 8,0    |
| PN 25 SF 32 VA | 25 | 16       | 1"     | 1.1/4"            | 280,0                | 50,8   | 8,0    |
| PN 32 SF VA    | 31 | 20       | 1.1/4" | 1.1/4"            | 280,0                | 50,8   | 8,0    |
| PN 32 SF 40 VA | 31 | 20       | 1.1/4" | 1.1/2"            | 210,0                | 60,3   | 8,0    |
| PN 40 SF VA    | 38 | 24       | 1.1/2" | 1.1/2"            | 210,0                | 60,3   | 8,0    |
| PN 40 SF 50 VA | 38 | 24       | 1.1/2" | 2"                | 210,0                | 71,4   | 9,5    |
| PN 50 SF VA    | 51 | 32       | 2"     | 2"                | 210,0                | 71,4   | 9,5    |
| PN 60 SF VA    | 60 | 40       | 2.3/8" | 2.1/2"            | 175,0                | 84,1   | 9,5    |

## Varijante proizvoda

PN SF Pritisna nazuvica, SFL, čelik