

# PA 700 AJF 90

Utična armatura, ORFS W90°

**HANSA FLEX**

## Osobine

**Oblast primene** Utična armatura za creva HD 400

**Priključak 1** UN/UNF navoj navrtke

**Oblik zaptivke 1** ravno zaptivanje

**Skraćenica** ORFS


**Norma** ISO 8434-3

**Uvezivanje** sa osiguračem kidanja (interlock)

**Obim isporuke** Pritisna nazuvica + pritisni priključak

**Materijal** čelik

**Površinska zaštita** galvanska prevlaka

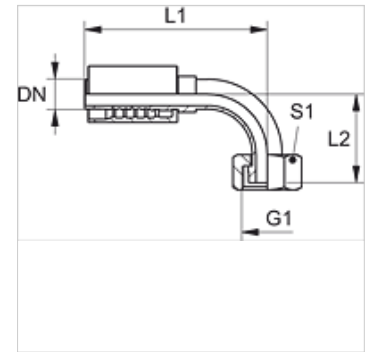

## Artikal

| Naziv         | DN | Veličina | col  | Radni pritisak (bar) | G1             | L1 (mm) | L2 (mm) | S1 |
|---------------|----|----------|------|----------------------|----------------|---------|---------|----|
| PA 713 AJF 90 | 12 | 8        | 1/2" | 413,0                | 13/16" -16 UN  | 85,5    | 43,5    | 27 |
| PA 716 AJF 90 | 16 | 10       | 5/8" | 413,0                | 1" -14 UNS     | 106,5   | 47,5    | 30 |
| PA 720 AJF 90 | 19 | 12       | 3/4" | 413,0                | 1.3/16" -12 UN | 126,0   | 56,0    | 36 |
| PA 725 AJF 90 | 25 | 16       | 1"   | 413,0                | 1.7/16" -12 UN | 157,5   | 68,0    | 41 |