


# K-BKR MINI DREHGRIFF

Mini ball valves with wing lever

**HANSA FLEX**

## Osobine

|                             |  |
|-----------------------------|--|
| Oblast primene              | Compressed air, water, oils, non-toxic gases |
| Radni pritisak              | maks. 10 bara                                |
| Temperatura medija          | -10 °C to +90 °C                             |
| Kućište i kugla             | Nickel-plated brass                          |
| Ručna poluga, obrtna ručica | Plastic                                      |
| Zaptivka kugle              | PTFE   |
| Zaptivka vretena            | FKM  |

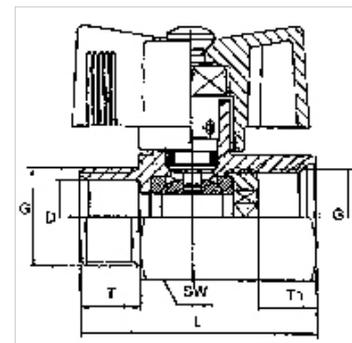

## Napomena

Ostali podaci na upit.

## Artikal

| Naziv          | DN | Navoj               | L<br>(mm) | SW<br>(mm) | T<br>(mm) | T1<br>(mm) |
|----------------|----|---------------------|-----------|------------|-----------|------------|
| K- 07 30 20 50 | 8  | G 1/4 female        | 41,5      | 21         | 9,0       | 10,5       |
| K- 07 30 20 51 | 8  | G 3/8 female        | 41,5      | 21         | 12,0      | 10,0       |
| K- 07 30 20 52 | 10 | G 1/2 female        | 47,0      | 24         | 12,5      | 10,5       |
| K- 07 30 20 34 | 8  | G 1/4 female/male   | 41,5      | 21         | 9,0       | 10,5       |
| K- 07 30 20 35 | 8  | G 3/8 female / male | 40,5      | 21         | 10,0      | 10,0       |
| K- 07 30 20 36 | 10 | G 1/2 female/male   | 46,0      | 25         | 12,0      | 10,6       |