# K-WTEH 3-TLG PC-BEHAEL MULTIFIX


Service units, 3-piece with polycarbonate bowl

HANSA FLEX

## Osobine

| | |
|---|---|
| **Ulazni pritisak** | Max. 16 bar (polycarbonate bowl), Max. 20 bar (metal bowl) |
| **Temperatura medija** | max. 60 °C |
| **Temperatura okoline** | Max. 60 °C |
| **Širina pora u elementu filtera** | 5 µm (BG 1 / BG 2), 40 µm (BG 3) |
| **Zaptivni materijal** | NBR |
| **Poklopac opruge** | POM-brass |
| **Kućište** | Die-cast zinc, Aluminium for G 1 variant |
| **Naglavak za kapljanje** | PA (polycarbonate bowl), Zinc-glass-NBR (metal bowl) |
| **Drain valve** | Semi-automatic |
| **Merenje vrednosti protoka** | At P1 = 8 bar, P2 = 6 bar and pressure drop Δp = 1 bar |



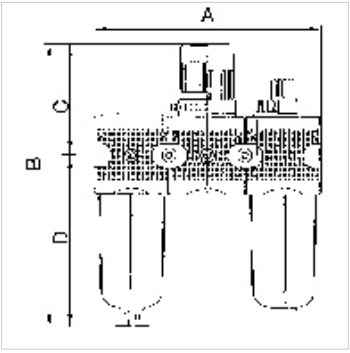


## Napomena

Ostali podaci na upit.

## Opis

Three-piece service units consisting of a reversible diaphragm pressure regulator, independent of inlet pressure, with self-relieving design, centrifugal separator and proportional lubricator.

## Napomene u vezi porudžbine

3-piece service units are also available in other control ranges (0.1 - 3 bar, 0.2 - 6 bar and 0.5 - 16 bar) and in lockable version. Please ask for more information.

## Dodatne informacije

1500 l/min: P1: 10 bar, P2: 7 bar, Δp ≤ 0.1 bar.

## Artikal

| Naziv | Navoj | Opseg regulacije | Protok (L/min) | A (mm) | B | C (mm) | D (mm) | DN | Konstrukciona veličina |
|---|---|---|---|---|---|---|---|---|---|
| **K- 07 25 01 10** | G 1/4 | 0.5 - 10 bar | 1100 | 137,8 | 192,1 mm | 67,0 | 125,1 | 6 | 1 |
| **K- 07 25 01 13** | G 3/8 | 0.5 - 10 bar | 1100 | 137,8 | 192,1 mm | 67,0 | 125,1 | 10 | 1 |
| **K- 07 25 01 16** | G 1/2 | 0.5 - 10 bar | 3000 | 200,8 | 246,3 mm | 99,0 | 147,3 | 15 | 2 |
| **K- 07 25 01 19** | G 3/4 | 0.5 - 10 bar | 3000 | 200,8 | 246,3 mm | 99,0 | 147,3 | 25 | 2 |
| **K- 07 25 01 22** | G 1 | 0.5 - 10 bar | 11300 | 300,0 | 381,8 mm | 128,0 | 253,8 | 25 | 3 |

## Rezervni delovi

| | |
|---|---|
| **K-HALTERBAUSATZ** | Holder |
| **K-SCHALTTAFELMUTTER** | Nut |
| **K-HALTERBAUSATZ MULTIFIX** | Holder |
| **K-KOPPELPAKET MEHR** | Coupling packet |
| **K-KOPPELPAKET SCHMA** | Coupling packet |
| **K-METALLBEHAELTER OELER MULTIFIX** | Metal tank oiler |
| **K-PC-BEHAELTER FILTER MULTIFIX** | Polycarbonate tank filter |
| **K-SCHUTZKORB G** | Protective cage |
| **K-TROPFAUFSATZ POLYCARBO 1** | Drip attachment polycarbonate |
| **K-TROPFAUFSATZ METALL** | Drip attachment metal |
| **K-FILTERELEMENT** | Filter element |
| **K-AUTOMAT ABLASSVENTIL** | Automatic drain valve |
| **K-VERSCHLEI-SATZ** | Set of wearing parts |

*Uprkos pažljivom proveravanju, ne možemo isključiti greške i ne preuzimamo nikakvu garanciju za navedene podatke.*