


# FI RL GEH

Kućište za filter povratnog voda

**HANSA FLEX**

## Osobine

|                |   |
|----------------|---|
| Verzija        | sa bajpas ventilom 1,75 bar, bez prikaza stepena zaprljanosti |
| Materijal      | Zaptivka: NBR   |
| Radni pritisak | maks. 8 bara  |
| Obim isporuke  | bez filterskog elementa                                       |

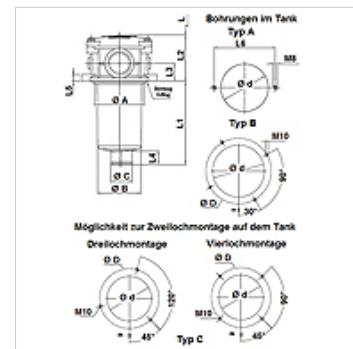

## Napomena

Mera "L": neophodan slobodni prostor za zamenu filterskog elementa

## Opis

Filter povratnog voda za ugradnju u poklopac rezervoara, za dimenzije šeme otvora vidi grafiku.

Connector for clogging indicator G 1/8" closed with bolt

## Napomene u vezi porudžbine

Filterski elemenat nije sadržan! Molimo poručite odvojeno.

## Artikal

| Naziv                     | za tip filtera | Priključak voda   | Ø A   | Ø B   | Ø C  | Ø d   | L     | L1    | L2    | L3   | L4   | L5   | L6    | Tip | Težina |
|---------------------------|----------------|-------------------|-------|-------|------|-------|-------|-------|-------|------|------|------|-------|-----|--------|
|                           |                |                   | (mm)  | (mm)  | (mm) | (mm)  | (mm)  | (mm)  | (mm)  | (mm) | (mm) | (mm) | (mm)  |     | (kg)   |
| FI RL GEH N 024 048 1/2   | FI RL 024, 048 | G 1/2"            | 66,0  | 60,0  | 32,0 | 67,0  | 100,0 | 86,0  | 59,0  | 22,0 | 19,0 | 8,0  | 90,0  | A   | 0,28   |
| FI RL GEH N 053 110 1/2   | FI RL 053, 110 | G 1/2"            | 88,0  | 80,0  | 38,0 | 89,0  | 120,0 | 100,0 | 82,0  | 32,0 | 24,0 | 12,0 | 115,0 | A   | 0,58   |
| FI RL GEH N 053 086 3/4   | FI RL 053, 086 | G 3/4"            | 88,0  | 80,0  | 38,0 | 89,0  | 120,0 | 100,0 | 82,0  | 32,0 | 24,0 | 12,0 | 115,0 | A   | 0,58   |
| FI RL GEH N 053 086 1     | FI RL 053, 086 | G 1"              | 88,0  | 80,0  | 38,0 | 89,0  | 120,0 | 100,0 | 82,0  | 32,0 | 24,0 | 12,0 | 115,0 | A   | 0,58   |
| FI RL GEH N 064 150 3/4   | FI RL 064, 150 | G 3/4"            | 88,0  | 80,0  | 38,0 | 89,0  | 170,0 | 150,0 | 80,0  | 32,0 | 24,0 | 12,0 | 115,0 | A   | 0,60   |
| FI RL GEH N 064 150 1     | FI RL 064, 150 | G 1"              | 88,0  | 80,0  | 38,0 | 89,0  | 170,0 | 150,0 | 80,0  | 32,0 | 24,0 | 12,0 | 115,0 | A   | 0,60   |
| FI RL GEH N 125 225 3/4   | FI RL 125, 225 | G 3/4"            | 88,0  | 80,0  | 46,5 | 89,0  | 250,0 | 225,0 | 80,0  | 32,0 | 24,0 | 12,0 | 115,0 | A   | 0,64   |
| FI RL GEH N 125 225 1     | FI RL 125, 225 | G 1"              | 88,0  | 80,0  | 46,5 | 89,0  | 250,0 | 225,0 | 80,0  | 32,0 | 24,0 | 12,0 | 115,0 | A   | 0,64   |
| FI RL GEH N 190 230 1 1/4 | FI RL 190, 230 | G 1.1/4"          | 129,5 | 112,0 | 47,0 | 131,0 | 250,0 | 233,0 | 91,0  | 35,0 | 31,0 | 13,0 | 175,0 | C   | 1,41   |
| FI RL GEH N 280 290 1 1/4 | FI RL 280, 290 | G 1.1/4"          | 173,5 | 150,0 | 51,0 | 174,5 | 200,0 | 180,0 | 97,0  | 38,5 | 38,0 | 12,5 | 220,0 | B   | 2,87   |
| FI RL GEH N 290 370 1 1/2 | FI RL 290, 370 | G 1.1/2"          | 173,5 | 150,0 | 51,0 | 174,5 | 200,0 | 180,0 | 97,0  | 38,5 | 38,0 | 12,5 | 220,0 | B   | 2,87   |
| FI RL GEH N 290 370 2     | FI RL 290, 370 | G 2"              | 173,5 | 150,0 | 51,0 | 174,5 | 200,0 | 180,0 | 97,0  | 38,5 | 38,0 | 12,5 | 220,0 | B   | 2,87   |
| FI RL GEH N 320 450 1 1/2 | FI RL 320, 450 | G 1.1/2"          | 173,5 | 150,0 | 64,0 | 174,5 | 250,0 | 238,0 | 98,5  | 38,5 | 38,0 | 12,5 | 220,0 | B   | 2,87   |
| FI RL GEH N 420 540 1 1/2 | FI RL 420, 540 | G 1.1/2"          | 173,5 | 150,0 | 64,0 | 174,5 | 310,0 | 290,0 | 97,0  | 38,5 | 38,0 | 12,5 | 220,0 | B   | 2,87   |
| FI RL GEH N 540 675 2     | FI RL 540, 675 | G 2"              | 173,5 | 150,0 | 64,0 | 174,5 | 310,0 | 290,0 | 97,0  | 38,5 | 38,0 | 12,5 | 220,0 | B   | 2,87   |
| FI RL GEH N 620 750 2     | FI RL 620, 750 | G 2"              | 173,5 | 150,0 | 64,0 | 174,5 | 450,0 | 430,0 | 105,0 | 48,5 | 38,0 | 12,5 | 220,0 | B   | 4,36   |
| FI RL GEH N 620 750 SAE2  | FI RL 620, 750 | 2" SAE 3000 PSI/M | 173,5 | 150,0 | 64,0 | 174,5 | 450,0 | 430,0 | 105,0 | 48,5 | 38,0 | 12,5 | 220,0 | B   | 4,36   |

## Pribor

|           |  |
|-----------|--|
| HK VA MAN | Clogging indicator pressure gauge        |
| FI RL RVL | Produžetak cevi za filter povratnog voda |

## je rezervni deo za sledeće proizvode

|       |                       |
|-------|-----------------------|
| FI RL | Filter povratnog voda |
|-------|-----------------------|

## Dodatni elementi

|            |   |
|------------|---|
| FI RL E MP | Element filtera za filter povratnog voda MP |
|------------|---|