


G AJF HB

Adaptör

Özellikler

| | |
|----------------------|------------------------|
| Bağlantı 1 | ORFS Somunlu |
| Sızdırmazlık şekli 1 | düzalın |
| Bağlantı 2 | BSP dış dış silindirik |
| Sızdırmazlık şekli 2 | 60° içe havşalı |
| Model | Adaptör . |
| Dizayn | düz |
| Malzeme | Çelik |
| Yüzey koruması | galvaniz kaplı |

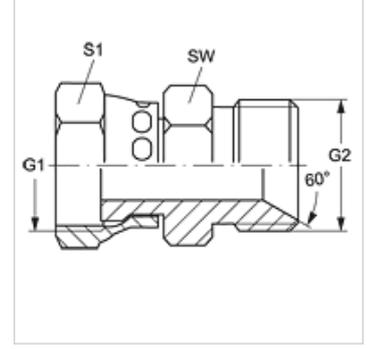

Ürün

| Tanım | G1 | G2 | SW (mm) | S1 |
|----------------|-----------------|--------------|------------|----|
| G AJF 04 HB | 9/16" -18 UNF | G 1/4" -19 | 19 | 17 |
| G AJF 04 HB 06 | 9/16" -18 UNF | G 3/8" -19 | 22 | 17 |
| G AJF 06 HB 04 | 11/16" -16 UN | G 1/4" -19 | 19 | 22 |
| G AJF 06 HB | 11/16" -16 UN | G 3/8" -19 | 22 | 22 |
| G AJF 06 HB 08 | 11/16" -16 UN | G 1/2" -14 | 27 | 22 |
| G AJF 08 HB 06 | 13/16" -16 UN | G 3/8" -19 | 22 | 24 |
| G AJF 08 HB | 13/16" -16 UN | G 1/2" -14 | 27 | 24 |
| G AJF 10 HB 08 | 1" -14 UNS | G 1/2" -14 | 27 | 30 |
| G AJF 10 HB | 1" -14 UNS | G 5/8" -14 | 30 | 30 |
| G AJF 10 HB 12 | 1" -14 UNS | G 3/4" -14 | 32 | 30 |
| G AJF 12 HB | 1.3/16" -12 UN | G 3/4" -14 | 32 | 36 |
| G AJF 12 HB 16 | 1.3/16" -12 UN | G 1" -11 | 41 | 36 |
| G AJF 16 HB 12 | 1.7/16" -12 UN | G 3/4" -14 | 32 | 41 |
| G AJF 16 HB | 1.7/16" -12 UN | G 1" -11 | 41 | 41 |
| G AJF 16 HB 20 | 1.7/16" -12 UN | G 1.1/4" -11 | 50 | 41 |
| G AJF 20 HB | 1.11/16" -12 UN | G 1.1/4" -11 | 50 | 50 |
| G AJF 24 HB | 2" -12 UN | G 1.1/2" -11 | 55 | 60 |

SW, S1, S2 = Anahtar genişliği