


K-NORMZYLINDER

Standard cylinders

HANSA FLEX

Özellikler

Akışkanlar	Filtered, unlubricated or lubricated compressed air. If lubrication is used, it must be continuous.
Çalışma basıncı	Max. 10 bar
Tepki verme basıncı	0,4 bar (Ø 32 bis Ø 40), 0,3 bar (Ø 50 bis Ø 63), 0,2 bar (Ø 80 bis Ø 125)
Sıcaklık sahası	-20 °C to +70 °C (Ø 32 to Ø 63) -10 °C to +70 °C (Ø 80 to Ø 125)
Yapısı	Heads / jacket with self-tapping screws
Piston çubuğu	C45 steel, hard chrome-plated
Boru	Anodised aluminium jacket with integrated T-slots
Piston	POM (Ø 20 to Ø 63); Aluminium (Ø 80 to Ø 125)
Yalıtım malzemesi	NBR

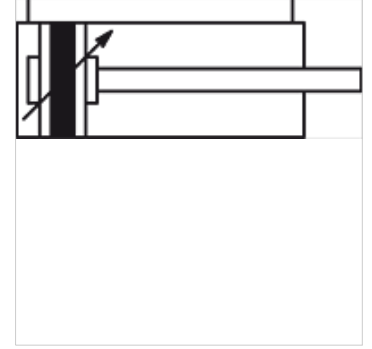

Açıklama

Diğer bilgiler, istek üzerinedir.

Açıklama

These cylinders are ideal for a wide range of applications owing to their robust design and excellent value for money. The standard type has a double-acting cylinder and features a magnetic piston as well as integrated cushioning. The magnetic switches can be mounted in two T-slots on the same side as the compressed air supply.
Cylinders of the same type can also be supplied on request with fixing parts for magnetic switches on three sides.
The version with a 125 mm bore is provided with fixing accessories on three sides as standard.

Ürün

Tanım	Ø piston	Darbe (mm)	Bağlantı	Ø piston çubuğu (mm)	Piston çubukları dış dişlisi
K- 07 15 15 90	32 mm	25	G 1/8	12	M 10 x 1.25
K- 07 15 15 91	32 mm	50	G 1/8	12	M 10 x 1.25
K- 07 15 15 92	32 mm	80	G 1/8	12	M 10 x 1.25
K- 07 15 15 93	32 mm	100	G 1/8	12	M 10 x 1.25
K- 07 15 15 94	32 mm	125	G 1/8	12	M 10 x 1.25
K- 07 15 15 95	32 mm	160	G 1/8	12	M 10 x 1.25
K- 07 15 15 96	32 mm	200	G 1/8	12	M 10 x 1.25
K- 07 15 15 97	32 mm	250	G 1/8	12	M 10 x 1.25
K- 07 15 15 98	32 mm	320	G 1/8	12	M 10 x 1.25
K- 07 15 15 99	32 mm	400	G 1/8	12	M 10 x 1.25
K- 07 15 16 00	32 mm	500	G 1/8	12	M 10 x 1.25
K- 07 15 16 01	32 mm	600	G 1/8	12	M 10 x 1.25
K- 07 15 16 02	32 mm	800	G 1/8	12	M 10 x 1.25
K- 07 15 16 03	40 mm	25	G 1/4	16	M 12 x 1.25
K- 07 15 16 04	40 mm	50	G 1/4	16	M 12 x 1.25
K- 07 15 16 05	40 mm	80	G 1/4	16	M 12 x 1.25
K- 07 15 16 06	40 mm	100	G 1/4	16	M 12 x 1.25
K- 07 15 16 07	40 mm	125	G 1/4	16	M 12 x 1.25
K- 07 15 16 08	40 mm	160	G 1/4	16	M 12 x 1.25
K- 07 15 16 09	40 mm	200	G 1/4	16	M 12 x 1.25
K- 07 15 16 10	40 mm	250	G 1/4	16	M 12 x 1.25
K- 07 15 16 11	40 mm	320	G 1/4	16	M 12 x 1.25
K- 07 15 16 12	40 mm	400	G 1/4	16	M 12 x 1.25
K- 07 15 16 13	40 mm	500	G 1/4	16	M 12 x 1.25
K- 07 15 16 14	40 mm	600	G 1/4	16	M 12 x 1.25
K- 07 15 16 15	40 mm	800	G 1/4	16	M 12 x 1.25
K- 07 15 16 16	50 mm	25	G 1/4	20	M 16 x 1.5
K- 07 15 16 17	50 mm	50	G 1/4	20	M 16 x 1.5
K- 07 15 16 18	50 mm	80	G 1/4	20	M 16 x 1.5
K- 07 15 16 19	50 mm	100	G 1/4	20	M 16 x 1.5
K- 07 15 16 20	50 mm	125	G 1/4	20	M 16 x 1.5
K- 07 15 16 21	50 mm	160	G 1/4	20	M 16 x 1.5
K- 07 15 16 22	50 mm	200	G 1/4	20	M 16 x 1.5
K- 07 15 16 23	50 mm	250	G 1/4	20	M 16 x 1.5
K- 07 15 16 24	50 mm	320	G 1/4	20	M 16 x 1.5
K- 07 15 16 25	50 mm	400	G 1/4	20	M 16 x 1.5



Titiz kontrole rağmen hatalar önlenemez ve sorumluluk altında bırakmayan bilgiler hakkında hiçbir sorumluluk kabul edilmez.

23.07.2024

HANSA-FLEX AG

www.hansa-flex.com

1

K-NORMZYLINDER

Standard cylinders

HANSA FLEX

Ürün

Tanım	Ø piston	Darbe (mm)	Bağlantı	Ø piston çubuğu (mm)	Piston çubukları dış dişlisi
K-07 15 16 26	50 mm	500	G 1/4	20	M 16 x 1.5
K-07 15 16 27	50 mm	600	G 1/4	20	M 16 x 1.5
K-07 15 16 28	50 mm	800	G 1/4	20	M 16 x 1.5
K-07 15 16 29	63 mm	25	G 3/8	20	M 16 x 1.5
K-07 15 16 30	63 mm	50	G 3/8	20	M 16 x 1.5
K-07 15 16 31	63 mm	80	G 3/8	20	M 16 x 1.5
K-07 15 16 32	63 mm	100	G 3/8	20	M 16 x 1.5
K-07 15 16 33	63 mm	125	G 3/8	20	M 16 x 1.5
K-07 15 16 34	63 mm	160	G 3/8	20	M 16 x 1.5
K-07 15 16 35	63 mm	200	G 3/8	20	M 16 x 1.5
K-07 15 16 36	63 mm	250	G 3/8	20	M 16 x 1.5
K-07 15 16 37	63 mm	320	G 3/8	20	M 16 x 1.5
K-07 15 16 38	63 mm	400	G 3/8	20	M 16 x 1.5
K-07 15 16 39	63 mm	500	G 3/8	20	M 16 x 1.5
K-07 15 16 40	63 mm	600	G 3/8	20	M 16 x 1.5
K-07 15 16 41	63 mm	800	G 3/8	20	M 16 x 1.5
K-07 15 16 42	80 mm	25	G 3/8	25	M 20 x 1.5
K-07 15 16 43	80 mm	50	G 3/8	25	M 20 x 1.5
K-07 15 16 44	80 mm	80	G 3/8	25	M 20 x 1.5
K-07 15 16 45	80 mm	100	G 3/8	25	M 20 x 1.5
K-07 15 16 46	80 mm	125	G 3/8	25	M 20 x 1.5
K-07 15 16 47	80 mm	160	G 3/8	25	M 20 x 1.5
K-07 15 16 48	80 mm	200	G 3/8	25	M 20 x 1.5
K-07 15 16 49	80 mm	250	G 3/8	25	M 20 x 1.5
K-07 15 16 50	80 mm	320	G 3/8	25	M 20 x 1.5
K-07 15 16 51	80 mm	400	G 3/8	25	M 20 x 1.5
K-07 15 16 52	80 mm	500	G 3/8	25	M 20 x 1.5
K-07 15 16 53	80 mm	600	G 3/8	25	M 20 x 1.5
K-07 15 16 54	80 mm	800	G 3/8	25	M 20 x 1.5
K-07 15 15 64	100 mm	25	G 1/2"	25	M 20 x 1.5
K-07 15 15 65	100 mm	50	G 1/2"	25	M 20 x 1.5
K-07 15 15 66	100 mm	80	G 1/2"	25	M 20 x 1.5
K-07 15 15 67	100 mm	100	G 1/2"	25	M 20 x 1.5
K-07 15 15 68	100 mm	125	G 1/2"	25	M 20 x 1.5
K-07 15 15 69	100 mm	160	G 1/2"	25	M 20 x 1.5
K-07 15 15 70	100 mm	200	G 1/2"	25	M 20 x 1.5
K-07 15 15 71	100 mm	250	G 1/2"	25	M 20 x 1.5
K-07 15 15 72	100 mm	320	G 1/2"	25	M 20 x 1.5
K-07 15 15 73	100 mm	400	G 1/2"	25	M 20 x 1.5
K-07 15 15 74	100 mm	500	G 1/2"	25	M 20 x 1.5
K-07 15 15 75	100 mm	600	G 1/2"	25	M 20 x 1.5
K-07 15 15 76	100 mm	800	G 1/2"	25	M 20 x 1.5
K-07 15 15 77	125 mm	25	G 1/2"	32	M 27 x 2
K-07 15 15 78	125 mm	50	G 1/2"	32	M 27 x 2
K-07 15 15 79	125 mm	80	G 1/2"	32	M 27 x 2
K-07 15 15 80	125 mm	100	G 1/2"	32	M 27 x 2
K-07 15 15 81	125 mm	125	G 1/2"	32	M 27 x 2
K-07 15 15 82	125 mm	160	G 1/2"	32	M 27 x 2
K-07 15 15 83	125 mm	200	G 1/2"	32	M 27 x 2
K-07 15 15 84	125 mm	250	G 1/2"	32	M 27 x 2
K-07 15 15 85	125 mm	320	G 1/2"	32	M 27 x 2
K-07 15 15 86	125 mm	400	G 1/2"	32	M 27 x 2
K-07 15 15 87	125 mm	500	G 1/2"	32	M 27 x 2
K-07 15 15 88	125 mm	600	G 1/2"	32	M 27 x 2
K-07 15 15 89	125 mm	800	G 1/2"	32	M 27 x 2

Aksesuar

K-FUSSBEFESTIGUNG 3	Foot model
K-SCHWENKGABELBEFESTIG	Female hinge model
K-SCHWENKAUGENBEFEST 1	Male hinge model
K-SPHAERISCHE SCHWENKAUGENB	Articulated male hinge model
K-GEGENLAGER 1	Counter-hinge model
K-FRONT ODER BODENFLANSCH	Flange model



Titiz kontrole rağmen hatalar önlenemez ve sorumluluk altında bırakmayan bilgiler hakkında hiçbir sorumluluk kabul edilmez.

23.07.2024

HANSA-FLEX AG

www.hansa-flex.com

2

