


# G HB HJ

## 连接接套

### 属性

|        |            |
|--------|------------|
| 密封形式 1 | 60°内锥      |
| 接口 1   | BSP外螺纹,圆柱形 |
| 接口 2   | UN/UNF外螺纹  |
| 密封形式 2 | 74°外锥      |
| 结构类型   | 接头管套       |
| 结构形式   | 直道         |
| 原料     | 钢          |
| 表面保护   | 电镀涂层       |

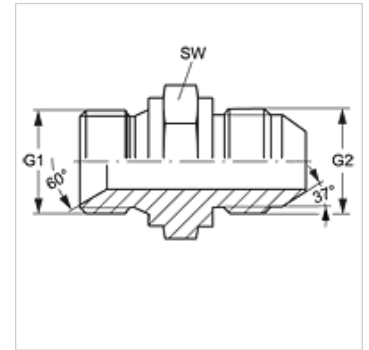

### 货品

| 名称            | G1           | G2             | SW<br>(mm) |
|---------------|--------------|----------------|------------|
| G HB 02 HJ 10 | G 1/8" -28   | 7/8" -14 UNF   | 24         |
| G HB 04 HJ 10 | G 1/4" -19   | 7/8" -14 UNF   | 24         |
| G HB 08 HJ 05 | G 1/2" -14   | 1/2" -20 UNF   | 27         |
| G HB 08 HJ 14 | G 1/2" -14   | 1.3/16" -12 UN | 32         |
| G HB 08 HJ 16 | G 1/2" -14   | 1.5/16" -12 UN | 41         |
| G HB 10 HJ 08 | G 5/8" -14   | 3/4" -16 UNF   | 27         |
| G HB 10 HJ    | G 5/8" -14   | 7/8" -14 UNF   | 27         |
| G HB 10 HJ 12 | G 5/8" -14   | 1.1/16" -12 UN | 32         |
| G HB 10 HJ 16 | G 5/8" -14   | 1.5/16" -12 UN | 41         |
| G HB 12 HJ 06 | G 3/4" -14   | 9/16" -18 UNF  | 32         |
| G HB 12 HJ 14 | G 3/4" -14   | 1.3/16" -12 UN | 32         |
| G HB 12 HJ 20 | G 3/4" -14   | 1.5/8" -12 UN  | 50         |
| G HB 16 HJ 08 | G 1" -11     | 3/4" -16 UNF   | 41         |
| G HB 16 HJ 10 | G 1" -11     | 7/8" -14 UNF   | 41         |
| G HB 16 HJ 14 | G 1" -11     | 1.3/16" -12 UN | 41         |
| G HB 20 HJ 12 | G 1.1/4" -11 | 1.1/16" -12 UN | 50         |
| G HB 24 HJ 16 | G 1.1/2" -11 | 1.5/16" -12 UN | 55         |
| G HB 24 HJ 32 | G 1.1/2" -11 | 2.1/2" -12 UN  | 60         |
| G HB 32 HJ 24 | G 2" -11     | 1.7/8" -12 UN  | 60         |
| G HB 32 HJ    | G 2" -11     | 2.1/2" -12 UN  | 60         |

SW = 对应边宽度