


属性

| | |
|--------|--------------|
| 接口 1 | 管接头 |
| 密封形式 1 | 切割环接口 |
| 缩略词 | BES |
| 标准 | ISO 8434-1 |
| 供货范围 | 压力内接头 + 压力卡套 |
| 原料 | 钢 |
| 表面保护 | 电镀涂层 |

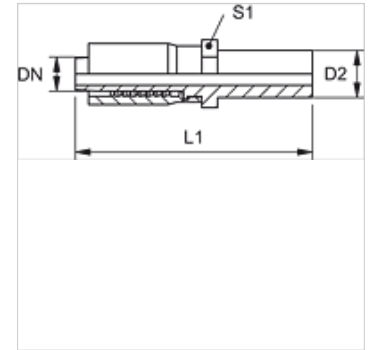

提示

切割环最终安装必须在硬化的预安装接套(VOM...)中进行。

货品

| 名称 | DN | 尺寸 | 英寸 | 结构系列 | D2 (mm) | L1 (mm) | SW (mm) |
|--------------|----|----|-------|------|------------|------------|------------|
| TRP 04 FS | 5 | 3 | 3/16" | S | 8,0 | 59,0 | 14 |
| TRP 06 FS | 6 | 4 | 1/4" | S | 10,0 | 67,0 | 14 |
| TRP 06 FS 04 | 6 | 4 | 1/4" | S | 8,0 | 65,0 | 14 |
| TRP 06 FS 08 | 6 | 4 | 1/4" | S | 12,0 | 68,0 | 17 |
| TRP 08 FS | 8 | 5 | 5/16" | S | 12,0 | 71,0 | 17 |
| TRP 08 FS 06 | 8 | 5 | 5/16" | S | 10,0 | 70,0 | 17 |
| TRP 10 FS | 10 | 6 | 3/8" | S | 14,0 | 79,0 | 19 |
| TRP 10 FS 06 | 10 | 6 | 3/8" | S | 10,0 | 75,0 | 19 |
| TRP 10 FS 08 | 10 | 6 | 3/8" | S | 12,0 | 77,0 | 19 |
| TRP 13 FS | 12 | 8 | 1/2" | S | 16,0 | 87,0 | 24 |