
# K-DRG DRV 250 NIEDERDRUCK

DRV 250 pressure regulators, low-pressure type

## 属性

| | |
|---|---|
| **入口压力** | Max. 25 bar (Series 200 and 300 Series), Max. 40 bar (400 Series) |
| **温度范围** | Max. 75 °C |
| **还原比例** | Max. 10:1 (200 Series), Max. 20:1 (300 Series), Max. 6:1 (400 Series) |
| **密封材料** | NBR |
| **弹簧罩** | Pressed brass up to DN 25, Grey cast iron from DN 32 |
| **壳体** | Red brass 2.1096.01 |



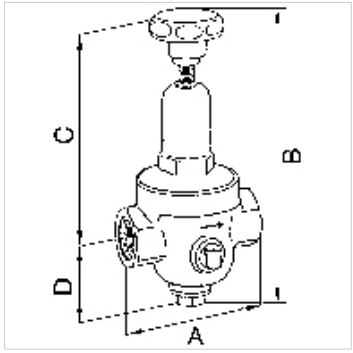


## 提示

其它数据应客户要求提供。

## 描述

Diaphragm pressure regulators with non-self-relieving design and non-pressure-reduced single-seated valve. Very precise adjustment. Good response characteristic because of only a few moving parts which hence minimal friction. Ideal for compressed air, nitrogen and other neutral, non-flammable gases, but only suitable for liquids with comparatively low flow rates.

## 订购指南

其他规格可应客户要求提供

## 附加信息

其他规格可应客户要求提供

## 货品

| 名称 | 螺纹 | 调节范围 | 流量 kvs 值 (m3/h) | A (mm) | B | C (mm) | D (mm) |
|---|---|---|---|---|---|---|---|
| **K- 07 25 04 94** | G 1/4 | 0.2 - 2 bar | 0,5 | 70,0 | 185,5 mm | 140,0 | 45,5 |
| **K- 07 25 04 95** | G 3/8 | 0.2 - 2 bar | 0,6 | 70,0 | 185,5 mm | 140,0 | 45,5 |
| **K- 07 25 04 96** | G 1/2 | 0.2 - 2 bar | 1,2 | 85,0 | 232,5 mm | 186,0 | 46,5 |

## 备件

| | |
|---|---|
| **K-VERSCHLEI-SATZ** | Set of wearing parts |

*尽管经过了仔细审阅,但我们无法完全排除发生错误的可能,对所提供的信息数据本公司不承担任何责任。*